



ABIMIG® A T 155 LW, ABIMIG® A T 255 LW

Slijtonderdelen

ABIMIG® A T 155 LW

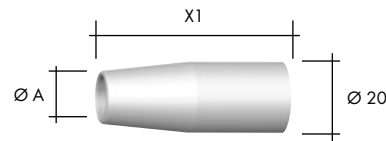


ABIMIG® A T 255 LW

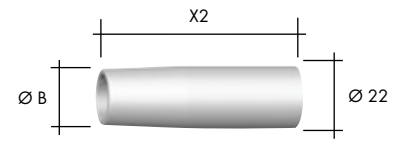



Gasmondstuk

	Ø A	X1		Ø B	X2	
Cilindrisch	Ø 17	52 mm	145.D003	Ø 18	69 mm	145.D014
Conisch	Ø 12	52 mm	145.D001 •	Ø 16	70 mm	145.D011 •
Conisch	Ø 12	54 mm	145.D004	Ø 14	67 mm	145.D012





Contacttip

		M6	M6
E-Cu	Ø 0,8	140.0059 •	140.0051
	Ø 1,0	140.0253	140.0242 •
	Ø 1,2	-	140.0379
E-Cu voor Al	Ø 0,8	141.0002	141.0001
	Ø 1,0	141.0007	141.0006
	Ø 1,2	-	141.0010
CuCrZr	Ø 0,8	140.0062	140.0054
	Ø 1,0	140.0256	140.0245
	Ø 1,2	-	140.0382



Contacttiphouder

M6	006.D719 •	004.D624 •
----	------------	------------



Isoleerring

	767.D607 •	767.D637 •
--	------------	------------

Halsgeleider

Standaard	Ø 0,8	122BE037	122BE037
	Ø 1,0	122BE038	122BE038
	Ø 1,2	-	122BE038
Messing voor Al	Ø 0,8	122BE040	122BE040
	Ø 1,0	122BE041	122BE041
	Ø 1,2	-	122BE041



Geleider

		3 m	4 m	5 m
Spiraal	Ø 0,8	124.0011 • ⁽¹⁾	124.0012 • ⁽¹⁾	124.0015 • ⁽¹⁾
	Ø 1,0	124.0026 • ⁽²⁾	124.0031 • ⁽²⁾	124.0035 • ⁽²⁾
	Ø 1,2	124.0026	124.0031	124.0035
PTFE	Ø 0,8	126.0005	126.0008	126.0011
	Ø 1,0	126.0021	126.0026	126.0028
	Ø 1,2	126.0021	126.0026	126.0028
KoolPTFE	Ø 0,8	127.0002	127.0003	127.0004
	Ø 1,0	127.0005	127.0007	127.0008
	Ø 1,2	127.0005	127.0007	127.0008



¹ ABIMIG A T 155

² ABIMIG A T 255

• Standaard uitrusting