



# ABIMIG® A T 305 LW, ABIMIG® A T 355 LW, ABIMIG® A T 405 LW

## Slijtonderdelen

### ABIMIG® A T 305 / 355 LW

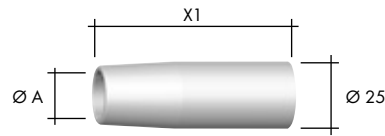


### ABIMIG® A T 405 LW

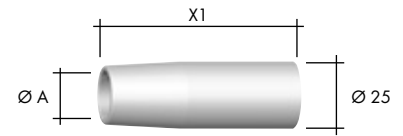


## Gasmondstuk

	Ø A	X1		Ø A	X1	
Cilindrisch	Ø 21	71 mm	145.D024	Ø 21	71 mm	145.D024
Conisch	Ø 18	72 mm	145.D021 •	Ø 18	72 mm	145.D021 •
Conisch	Ø 16	69 mm	145.D022	Ø 16	69 mm	145.D022





**M8**



**M8**



## Contacttip

E-Cu	Ø 0,8		140.0114			140.0114
	Ø 1,0		140.0313			140.0313
	Ø 1,2		140.0442			140.0442
	Ø 1,6		140.0587			140.0587
E-Cu voor Al	Ø 0,8		141.0003			141.0003
	Ø 1,0		141.0008			141.0008
	Ø 1,2		141.0015			141.0015
	Ø 1,6		141.0022			141.0022
CuCrZr	Ø 0,8		140.0117			140.0117
	Ø 1,0		140.0316			140.0316
	Ø 1,2		140.0445 •			140.0445
	Ø 1,6		140.0590			140.0590 •



## Contacttiphouder

M8		014.D745 •		014.D745 •
----	--	------------	--	------------



## Isoleerring

		767.D668 •		015.D080 •
--	--	------------	--	------------

## Halsgeleider

Standaard	Ø 0,8		122BE037		-
	Ø 1,0-1,2		122BE038 •		122BE077
	Ø 1,6		122BE045		122BE078 •
Messing voor Al	Ø 1,0		122BE040		122BE040
	Ø 1,0-1,2		122BE041		122BE041



Geleider		305 / 355	405	305 / 355	405	305 / 355	405
		3 m	3 m	4 m	4 m	5 m	5 m
Spiraal	0,8	124.0011	-	124.0012	-	124.0015	-
	1,0	124.0026 •	124.D113	124.0031 •	124.D114	124.0035 •	124.D115
	1,2	124.0026 •	124.D113	124.0031 •	124.D114	124.0035 •	124.D115
	1,6	124.0041	124.D116 •	124.0042	124.D117 •	124.0044	124.D118 •
PTFE	0,8	126.0005	-	126.0008	-	126.0011	-
	1,0	126.0021	-	126.0026	-	126.0028	-
	1,2	126.0021	-	126.0026	-	126.0028	-
	1,6	126.0039	-	126.0042	-	126.0045	-
Kool PTFE	0,8	127.0002	-	127.0003	-	127.0004	-
	1,0	127.0005	-	127.0007	-	127.0008	-
	1,2	127.0005	-	127.0007	-	127.0008	-
	1,6	127.0010	-	127.0012	-	127.0013	-



• Standaard uitrusting